



Proportional-pressure regulators VPPE


FESTO



Product range overview


Function	Design	Pneumatic connection	Nominal width pressurisation/exhaust [mm]	Pressure regulation range		Setpoint input		→ Page/ Internet
				[MPa]	[bar]	Voltage type 0 ... 10 V	Current type 4 ... 20 mA	
Proportional- pressure regulator	Without display							
		G1/8	5/2.5	0.015 ... 0.6	0.15 ... 6	■	–	6
Proportional- pressure regulator	With display							
		G1/8	5/2.5	0.002 ... 0.2	0.02 ... 2	■	■	11
				0.006 ... 0.6	0.06 ... 6			
0.01 ... 1				0.1 ... 10				

Peripherals overview

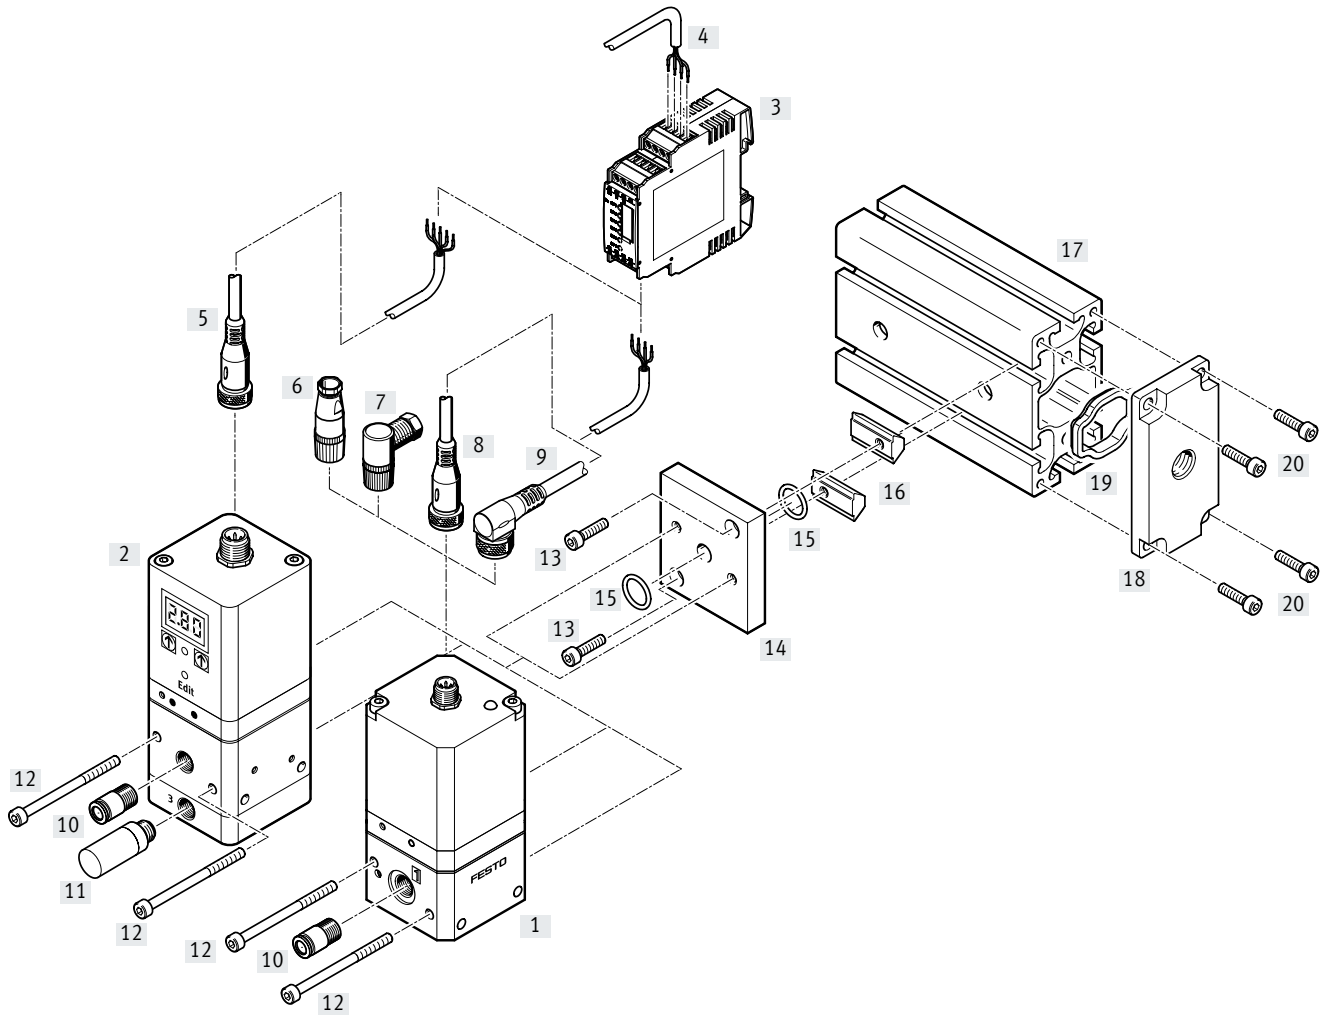

Accessories		Type	Description	→ Page/Internet
[1]	Prop.-pressure regulator	VPPE...	–	9
[2]	Prop.-pressure regulator with display	VPPE ... E1	–	15
[3]	Setpoint module	MPZ	For generating 6+1 analogue voltage signals	9, 15
[4]	Digital input/output	–	For actuating the setpoint module	–
[5]	Connecting cable	SIM-M12-5GD-...-PU	With straight plug socket for actuating the VPPE...E1	1
[6]	Connection socket	SIE-GD	Straight plug socket for actuating the VPPE	15
[7]	Connection socket	SIE-WD-TR	Angled plug socket for actuating the VPPE	9
[8]	Connecting cable	SIM-M12-4GD-5PU	With straight plug socket for actuating the VPPE	9
[9]	Connecting cable	SIM-M12-4WD-5PU	With angled plug socket for actuating the VPPE	9
[10]	Push-in fitting	QS	For connecting compressed air tubing with standard O.D.	quick star
[11]	Silencer	U	For mounting in exhaust ports	u
[12]	Socket head screw M4x55	–	For screwing the VPPE to the mounting plate	17
[13]	Socket head screw M4x16	–	For screwing the mounting plate to the slot nut	17
[14]	Mounting plate (set)	VAME-P5-MK	For attaching the VPPE to the profile strip (consists of mounting plate, slot nuts, screws and seals)	17
[15]	O-ring	–	For sealing	17
[16]	Slot nuts	–	For clamp fastening on the profile strip	17
[17]	Profile strip	–	Standard profile strip as central air supply	17
[18]	Compressed air supply plate (set)	VABF-P5-P3A3...	For supplying compressed air (consists of compressed air supply plate, screws and seal)	17
[19]	Seal	–	–	17
[20]	Socket head screw M5x12	–	For screwing the compressed air supply plate to the profile strip	17

Peripherals overview – Additional supply

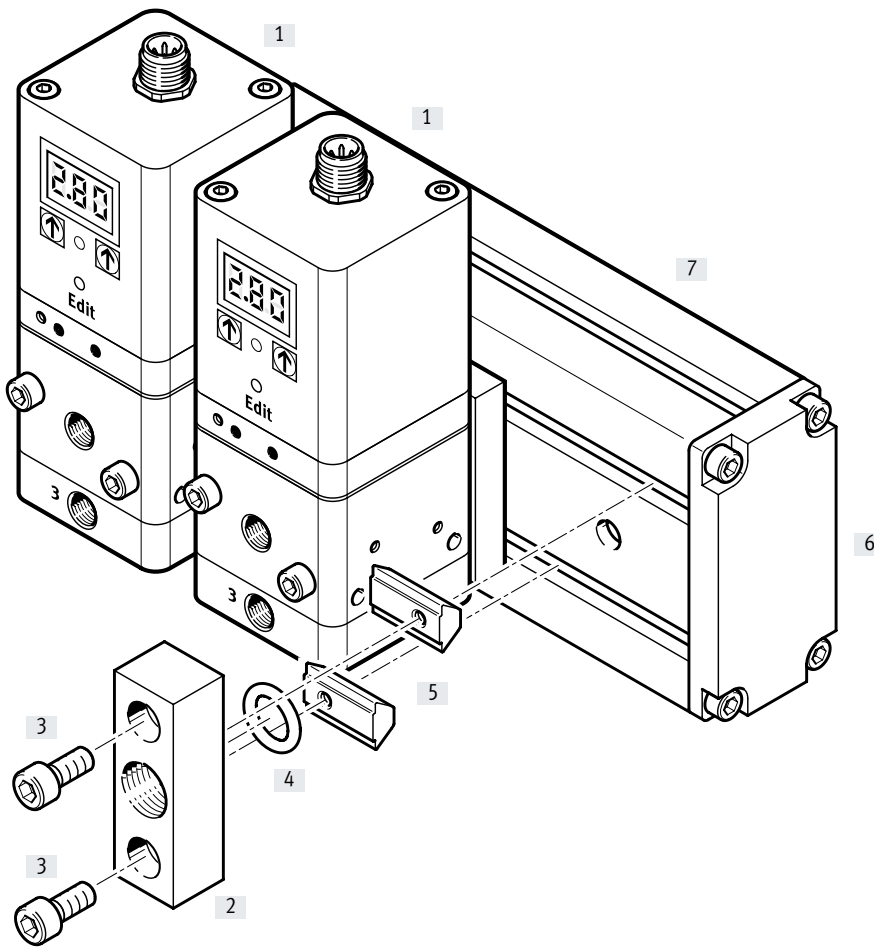

Accessories				
		Type	Description	→ Page/Internet
[1]	Prop.-pressure regulator with display	VPPE ... E1	–	15
[2]	Additional supply (set)	VABF-P5-P1A3...	For supplying compressed air (consists of compressed air supply plate, screws and seal)	17
[3]	Socket head screw M6x20	–	For screwing the compressed air supply plate to the slot nut	17
[4]	O-ring	–	For sealing	17
[5]	Slot nuts	–	For clamp fastening on the profile strip	17
[6]	End plate (set)	VABE-P5-C	For sealing the profile strip (consists of an end plate, screws and seal)	17
[7]	Profile strip	–	Standard profile strip as central air supply	17

Type codes

001	Series
VPPE	Proportional pressure regulator




002	Valve function
3	3-way proportional-pressure regulator, closed

003	Pneumatic connection
1/8	Female thread G1/8

004	Pressure regulation range
6	0.15 ... 6 bar

005	Setpoint input for individual valves
010	0 ... 10 V

Data sheet

-  Flow rate
850 l/min
-  Voltage
21.6 ... 26.4 V DC
-  Pressure regulation range
0.015 ... 0.6 MPa


- Variants
- Setpoint input as analogue voltage signal 0 ... 10 V




General technical data

Pneumatic connection 1 and 2	G1/8		
Design, valve function	Piloted piston regulator, 3-way prop.-pressure regulator, closed		
Safety remark	Safety position VPPE		
Sealing principle	Soft		
Actuation type	Electrical		
Type of control	Piloted via 2/2-way valves		
Type of mounting	Via through-hole		
Mounting position	Any, preferably vertical		
Nominal width	Pressurisation	[mm]	5
	Exhaust	[mm]	2.5
Standard nominal flow rate		[l/min]	→ graph
Product weight		[g]	445

Flow rate qn as a function of output pressure p2

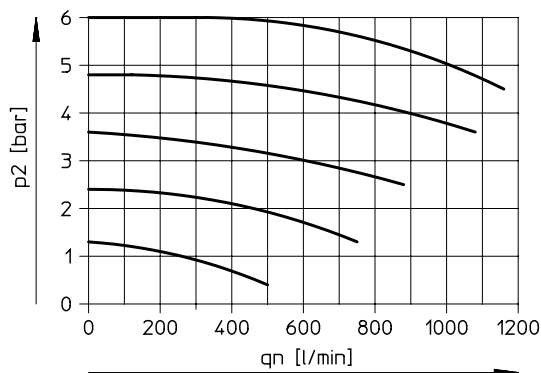


 **Note**
Output pressure remains unregulated if the power supply cable is interrupted.

Electrical data


Electrical connection	Plug, round design, 4-pin, M12x1		
Operating voltage range	[V DC]	21.6 ... 26.4	
Operating voltage indicator	LED		
Residual ripple	[%]	10	
Max. electrical power consumption	[W]	3.6	
Max. current consumption	[mA]	150	
Setpoint input signal	[V DC]	0 ... 10	
Switching time on/off	[ms]	55 0/1300	
Short circuit current rating/reverse polarity protection	For all electrical connections		
Degree of protection	IP65		

M12x1 – Pin allocation for VPPE



- 1 Supply
21.6 ... 26.4 V DC
- 2 Setpoint value (-)
- 3 GND (-)
- 4 Setpoint value (+) 0 ... 10 V DC

Circuit symbol



Data sheet

Operating and environmental conditions		
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]
		Inert gases
Note on the operating/pilot medium		Lubricated operation not possible
Operating pressure	[MPa]	0.8
	[bar]	≤ 8
Input pressure 1	[MPa]	0.6 ... 0.8
	[bar]	6 ... 8
Pressure regulation range	[MPa]	0.015 ... 0.6
	[bar]	0.15 ... 6
Max. pressure hysteresis	[MPa]	0.015
	[bar]	0.15
Hysteresis FS (full scale)	[%]	2.5
Linearity error FS (full scale)	[%]	1
Repetition accuracy FS (full scale)	[%]	0.5
Overall accuracy FS (full scale)	[%]	2.25
Temperature coefficient	[%/K]	0.04
Ambient temperature	[°C]	10 ... 50
Temperature of medium	[°C]	10 ... 50
Corrosion resistance class CRC ¹⁾		2
CE marking (see declaration of conformity)		To EU EMC Directive ²⁾
Certification		RCM
		cUL us listed (OL)

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

2) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.


If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Materials	
Housing	Wrought aluminium alloy
Diaphragm	NBR
Note on materials	RoHS-compliant
PWIS conformity	VDMA24364-B2-L

Data sheet

Dimensions







Download CAD data → www.festo.com

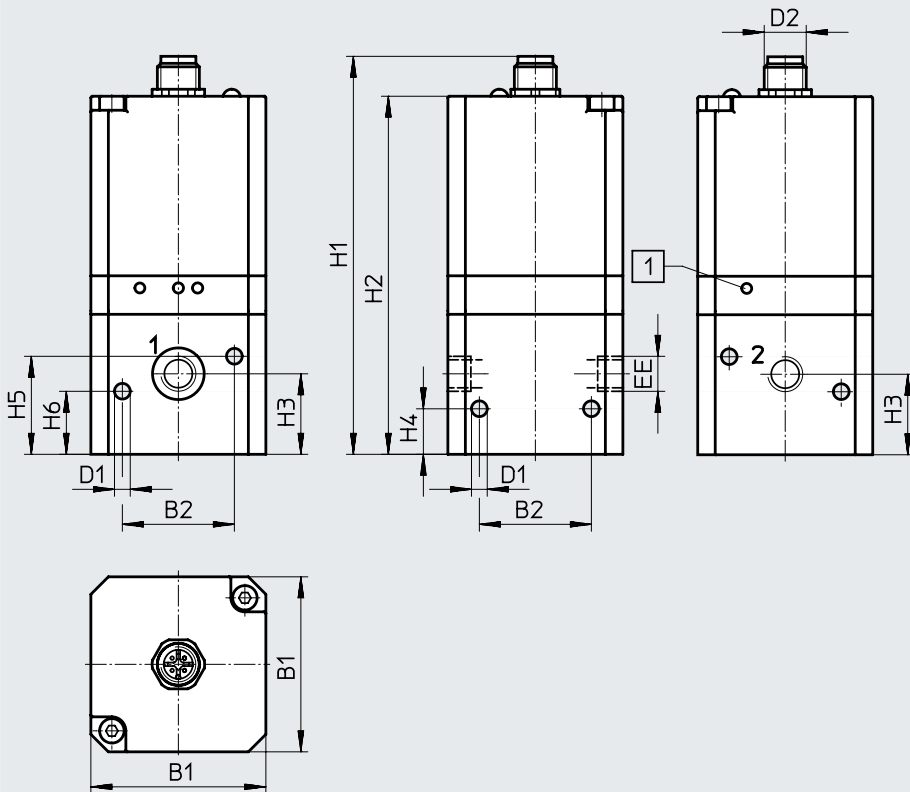

[1] Earthing hole

Type	B1	B2	D1 ∅	D2	EE	H1	H2	H3	H4	H5	H6
VPPE-3-1/8-6-010	50	32	4.5	M12x1	G1/8	114	102	23	13	28	18

Ordering data




Ordering data	Description	Part no.	Type
Proportional-pressure regulator VPPE without display			
	<ul style="list-style-type: none"> • Pressure regulation range: 0.015 ... 0.6 MPa • Pneumatic connection: G1/8 	539639	VPPE-3-1/8-6-010
Connecting cable			
	<ul style="list-style-type: none"> • Straight socket, M12x1, 5-pin • Open end, 4-wire, cable length 5 m 	164259	SIM-M12-4GD-5-PU
	<ul style="list-style-type: none"> • Angled socket, M12x1, 5-pin • Open end, 4-wire, cable length 5 m 	164258	SIM-M12-4WD-5-PU
Connection socket			
	Straight socket, M12x1, 4-pin	18494	SIE-GD
	Angled socket, M12x1, 4-pin	12956	SIE-WD-TR
Setpoint module			
	Setpoint module for generating 6 + 1 analogue voltage signals	546224	MPZ-1-24DC-SGH-6-SW

Type codes

001	Series
VPPE	Proportional pressure regulator
002	Valve function
	None
3	3-way valve
003	Valve function
1	Normally closed
004	Pneumatic connection
1/8	Female thread G1/8

005	Pressure regulation range
2	0.02 ... 2 bar
6	0.06 ... 6 bar
10	0.1 ... 10 bar
006	Setpoint input for individual valves
010	0 ... 10 V
420	4 ... 20 mA
007	Operator unit/interface
	None
E1	LED display, 7-segment
008	Mounting
	In-line valve
T	Common supply manifold mounting (mounting rail)

Data sheet

-  Flow rate
310 ... 1250 l/min
-  Voltage
21.6 ... 26.4 V DC
-  Pressure regulation ranges
0.002 ... 0.2 MPa
0.006 ... 0.6 MPa
0.01 ... 1 MPa

- Variants
- Setpoint input as analogue voltage signal 0 ... 10 V
 - Setpoint input as analogue current signal 4 ... 20 mA
 - Assembly as in-line valve or on profile strip
 - 3-digit LED display



General technical data



Pneumatic connection 1, 2, 3	G1/8		
Design, valve function	Piloted diaphragm regulator, 3-way prop.-pressure regulator		
Safety remark	Safety position VPPE		
Sealing principle	Soft		
Actuation type	Electrical		
Reset method	Mechanical spring		
Type of control	Piloted via 2/2-way valves		
Type of mounting	Via through-hole		
Mounting position	Any, preferably upright		
Nominal width	Pressurisation	[mm]	5
	Exhaust	[mm]	2.5
Standard nominal flow rate		[l/min]	→ graphs
Product weight		[g]	390

Flow rate qn as a function of output pressure p2

VPPE- ... -2- ...

qn 1 → 2



qn 2 → 3

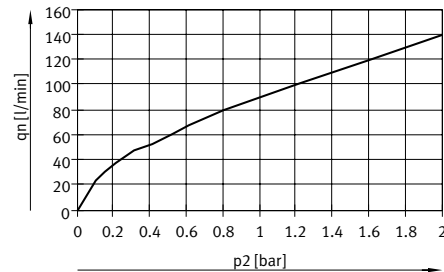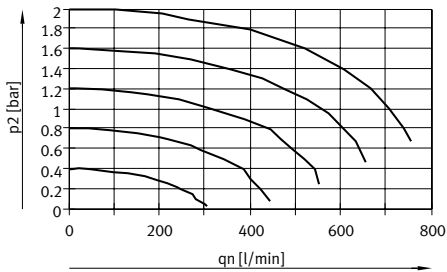

VPPE- ... -6- ...

qn 1 → 2



qn 2 → 3

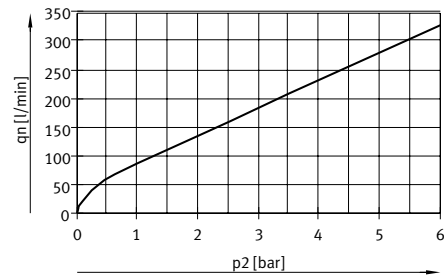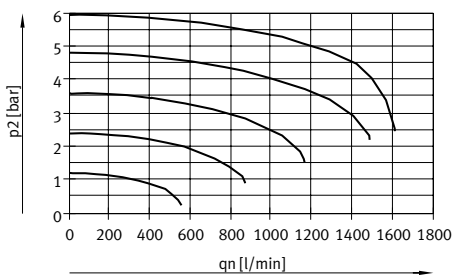

VPPE- ... -10- ...

qn 1 → 2

qn 2 → 3

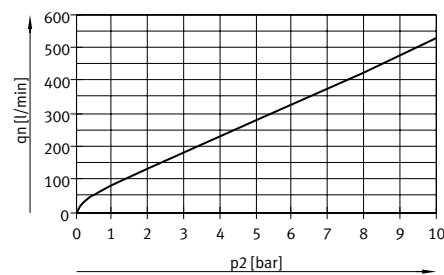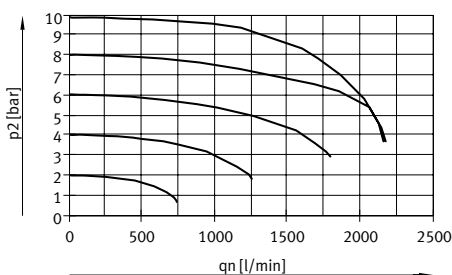

Data sheet

Electrical data				
Electrical connection	Plug, round design, 5-pin, M12x1			
Operating voltage range	[V DC]	21.6 ... 26.4		
Operating voltage indicator	LED			
Residual ripple	[%]	10		
Max. electrical power consumption	[W]	4.2		
Max. current consumption	[mA]	160		
Signal range for analogue output/input	Voltage	[V DC]	0 ... 10	
	Current	[mA]	4 ... 20	
Short circuit current rating	For all electrical connections			
Switching output	PNP			
Reverse-polarity protection	For all electrical connections			
Degree of protection	IP65			
Operating and environmental conditions				
Pressure regulation range	[MPa]	0.002 ... 0.2	0.006 ... 0.6	0.01 ... 1
	[bar]	0.02 ... 2	0.06 ... 6	0.1 ... 10
Operating medium	Compressed air to ISO 8573-1:2010 [7:4:4] Inert gases			
Note on the operating/pilot medium	Lubricated operation not possible			
Input pressure 1 ¹⁾	[MPa]	0.3 ... 0.4	0.6 ... 0.8	0.6 ... 1.1
	[bar]	3 ... 4	6 ... 8	6 ... 11
Max. pressure hysteresis	[MPa]	0.002	0.003	0.005
	[bar]	0.02	0.03	0.05
Hysteresis FS (full scale)	[%]	1	0.5	
Linearity error FS (full scale)	[%]	1		
Repetition accuracy FS (full scale)	[%]	0.5		
Overall accuracy FS (full scale)	[%]	1.5	1.25	
Temperature coefficient	[%/K]	0.04		
Duty cycle	[%]	100		
Ambient temperature	[°C]	0 ... 60		
Temperature of medium	[°C]	10 ... 50		
Corrosion resistance class	[CRC]	2 ²⁾		
CE marking (see declaration of conformity)	To EU EMC Directive ³⁾			
Certification	RCM			
	c UL us listed (OL)			

1) Input pressure 1 should always be 1 bar greater than the maximum regulated output pressure.

2) Corrosion resistance class CRC 2 to Festo standard FN 940070


Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.

3) For information about the area of use, see the EC declaration of conformity at: www.festo.com/catalogue/... → Support/Downloads.

If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.


Data sheet

Pin allocation for VPPE with display, M12x1



- 1 Supply
21.6 ... 26.4 V DC
- 2 Setpoint value (-)
- 3 GND (-)
- 4 Setpoint value (+) 0 ... 10 V DC /
4 ... 20 mA
- 5 Actual value output or switching
output (can be selected on the
operator panel)

Circuit symbol



Materials

Housing	Anodised wrought aluminium alloy
Note on materials	RoHS-compliant Free of copper and PTFE
PWIS conformity	VDMA24364-B2-L


**Note**

Output pressure remains unregulated if the supply cable is interrupted.

Data sheet

Dimensions




Download CAD data → www.festo.com

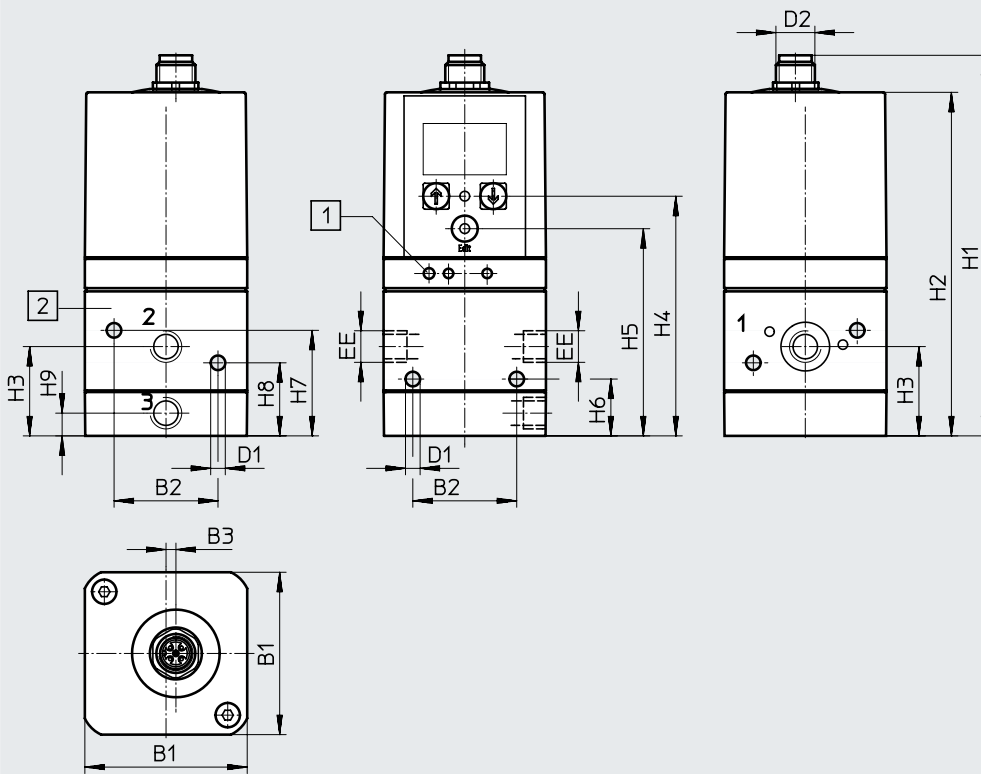

- [1] Earthing hole
- [2] Booster turned by 90°
with variant VPPE-...-E1T

Type	B1	B2	B3	@ D1	D2	EE	H1	H2	H3	H4	H5	H6	H7	H8	H9
VPPE-3-1/8- ... E1 ...	50	32	3.1	4.5	M12x1	G1/8	117.2	105.8	27.5	73.8	63.8	17.5	32.5	22.5	7

Ordering data

Ordering data	Description	Part no.	Type	
Proportional-pressure regulator VPPE with display				
	Voltage type 0 ... 10 V			
	Pressure regulation range 0.002 ... 0.2 MPa	557771	VPPE-3-1-1/8-2-010-E1	
		557777	VPPE-3-1-1/8-2-010-E1T	
	Pressure regulation range 0.006 ... 0.6 MPa	557772	VPPE-3-1-1/8-6-010-E1	
		567539	VPPE-3-1-1/8-6-010-E1T	
	Pressure regulation range 0.01 ... 1 MPa	557773	VPPE-3-1-1/8-10-010-E1	
		557778	VPPE-3-1-1/8-10-010-E1T	
	Current type 4 ... 20 mA			
	Pressure regulation range 0.002 ... 0.2 MPa	557774	VPPE-3-1-1/8-2-420-E1	
		557779	VPPE-3-1-1/8-2-420-E1T	
	Pressure regulation range 0.006 ... 0.6 MPa	557775	VPPE-3-1-1/8-6-420-E1	
		567540	VPPE-3-1-1/8-6-420-E1T	
	Pressure regulation range 0.01 ... 1 MPa	557776	VPPE-3-1-1/8-10-420-E1	
		557780	VPPE-3-1-1/8-10-420-E1T	
Connecting cable Data sheets → Internet: nebu				
	• Straight socket, M12x1, 5-pin	2.5 m	175715	SIM-M12-5GD-2.5-PU
	• Open end, 5-wire	5 m	175716	SIM-M12-5GD-5-PU
Setpoint module Data sheets → Internet: mpz				
	Setpoint module for generating 6 + 1 analogue voltage signals	546224	MPZ-1-24DC-SGH-6-SW	

Data sheet

General information

Design

Some selected types of the pressure regulator VPPE can be screwed to a profile strip. This has the advantage that the profile strip can be used to create a central compressed air supply.

The air can be fed into the profile strip:

- at one end or
- at both ends through end plates,
- using an intermediate air supply module (in applications where an increased air rate is required).

The holes for the profile strip must be drilled according to the assembly instructions. The pressure regulators VPPE are screwed to the profile strip using the mounting plate. The end plates are screwed to the left and right end faces of the profile strip. See the

assembly instructions for further information:

→ Internet: vppe

Compressed air supply on the profile strip

When using the profile strip as a central compressed air supply, make sure that the required compressed air supply is guaranteed. Bear in mind that an intermediate air supply module needs

a valve position. The intermediate air supply module takes up one VPPE valve position.

Recommendation for compressed air supply

For example, with tubing diameter \varnothing 16 mm with simultaneous max. flow rate for all valves, the following applies:

Compressed air supply – number of valves:

- At one end – max. 5 valves
- At both ends – max. 10 valves
- With intermediate air supply module – max. 5 valves each

Note

- Intermediate air supply modules must always be centred on the profile strip.
- Multiple intermediate air supply modules must be evenly distributed.

Note

Only the following types of proportional-pressure regulators VPPE can be mounted on profile strips using a mounting plate:

- Valve VPPE with LED display, VPPE-3-1/8-6-010
- Valve VPPE with display and top part rotated by 90° VPPE- ... –E1T

Further information on mounting proportional-pressure regulators VPPE as well as intermediate air supply modules on profile strips can be found in the assembly instructions:

→ Internet: vppe

Mounting plate (set) materials


Plate	Wrought aluminium alloy
Seals	NBR
Screws	Steel
Note on materials	RoHS-compliant
Corrosion resistance class	[CRC] 2 ¹⁾

1) Corrosion resistance class CRC 2 to Festo standard FN 940070

Moderate corrosion stress. Indoor applications in which condensation can occur. External visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment.






Mounting plate dimensions

Download CAD data → www.festo.com

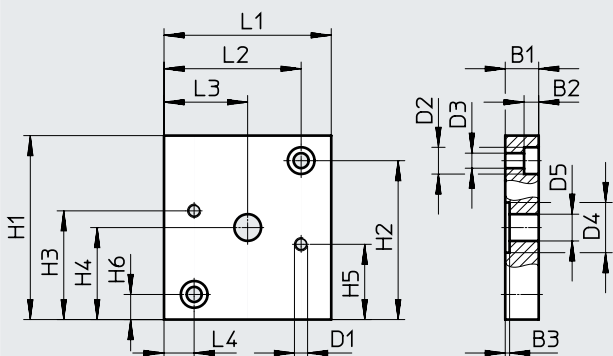

Type	B1	B2	B3	D1	@ D2	@ D3	@ D4	@ D5	H1	H2	H3	H4	H5	H6	L1	L2	L3	L4
VAME-P5-MK	10	4.6	1.3	M4	8	4.5	15	8	55	47.5	32.5	27.5	22.5	7.5	50	41	25	9

Ordering data

Ordering data	Description	Part no.	Type
Mounting plate set			
	Set comprising: <ul style="list-style-type: none"> • 1x mounting plate, weight: 110 g • 2x socket head screws M4X55 • 2x socket head screws M4X16 • 2x slot nuts • 2x O-rings 	570966	VAME-P5-MK
Profile column (profile strip)			
	Made from aluminium, as central air supply, length: individually adaptable	175964	HMBS-8 0/40- -
End plate set (closed)			
	For sealing the profile strip, consisting of: <ul style="list-style-type: none"> • 1x plate • 1x seal • 4x socket head screws M5x12 	8021858	VABE-P5-C
Compressed air supply plate set			
	With connecting thread G1/4, consisting of: <ul style="list-style-type: none"> • 1x plate with connecting thread G1/4 • 1x seal • 4x socket head screws M5x12 	8021859	VABF-P5-P3A3-G14
	With connecting thread G3/8, consisting of: <ul style="list-style-type: none"> • 1x plate with connecting thread G3/8 • 1x seal • 4x socket head screws M5x12 	8021860	VABF-P5-P3A3-G38
	With connecting thread G1/2, consisting of: <ul style="list-style-type: none"> • 1x plate with connecting thread G1/2 • 1x seal • 4x socket head screws M5x12 	8021861	VABF-P5-P3A3-G12
Additional supply set			
	Connection G1/4, consisting of: <ul style="list-style-type: none"> • 1x plate with connecting thread G1/4 • 1x O-ring • 2x slot nuts • 2x socket head screws M6x20 	8021862	VABF-P5-P1A3-G14
	Connection G3/8, consisting of: <ul style="list-style-type: none"> • 1x plate with connecting thread G3/8 • 1x O-ring • 2x slot nuts • 2x socket head screws M6x20 	8021863	VABF-P5-P1A3-G38